

SWING CHECK VALVE

FLANGED ENDS

304622
PN16

3:10


DESCRIPTION: Straight type, Rg5 body, full bore swing check valve with PTFE soft sealing. Flat face flanged.

APPLICATION: Preventing backflow in water, sea water and oil systems etc.


STANDARD & DESIGN:

Design Code: -
 Inspection Std.: -
 End Std.: UNI EN 1092-3:2005
 Face to Face Std.: -
 Flanges drilled: PN16(DN15-DN100)
 Pressure rating: PN16(DN15-DN100)
 Temperature Range: -10°C to 180°C

VARIATIONS: With metal seat.

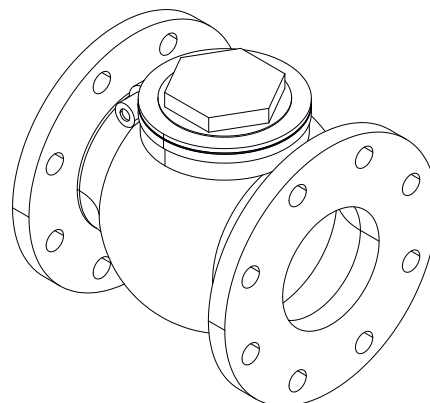

No	Part	Material	Code
1	Body	Bronze	CC491K
2	Plug	Brass	CW614N
3	Disc	Brass	CW614N
4	Swing Arm	Brass	CW614N
5	Pivot	Brass	CW614N
6	Screw	Brass	CW614N
7	Body Gasket	Fiber	-
8	Nut	Brass	CW614N

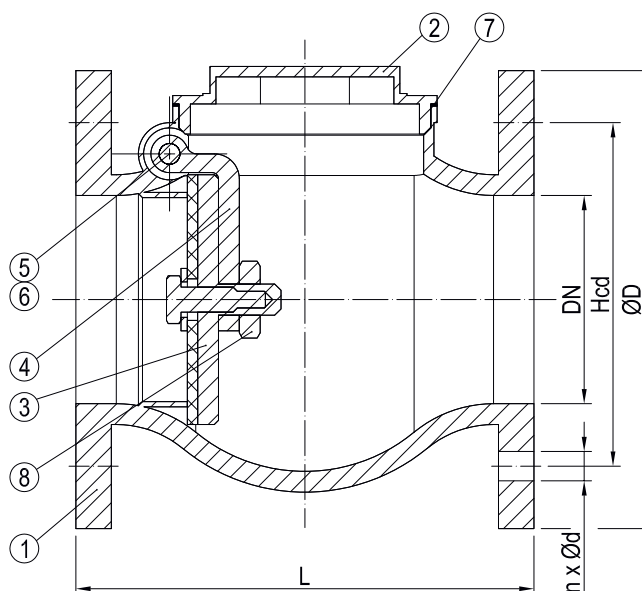

DN	n x ød	Hcd	øD	L	Kg
15	4x14	65	95	90	1.5
20	4x14	75	105	90	1.8
25	4x14	85	115	99	2.5
32	4x18	100	140	110	3.7
40	4x18	110	150	130	4.5
50	4x18	125	165	150	5.7
65	4x18	145	185	175	9.4
80	8x18	160	200	180	10.4
100	8x18	180	220	220	13.0